

Delta® HT-E-SEER

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approval _____
Date _____

Delta® HT-E-SEER

Models

Delta HT-E-SEER

No Stand



Standard Features

- Steam Elimination
- Energy Recovery System collects the hot water vapor inside the machine and uses it to preheat the incoming rinse water
- Operates on a single cold water connection
- Soft Start helps protect glassware from chipping and breaking
- Stainless steel rear dress panel
- Automatic fill
- Push button start
- Door interlock
- Pressure regulator
- Built-in booster heater with Sani-Sure™ final rinse system
- Automatic pumped drain for floor and wall drain installations
- Stainless steel wash pump
- Universal timer
- Digital LED control panel
- Delime cycle
- Simplified controls allow easy access for operation and service
- Built-in chemical pumps and priming switches

Mandatory Specs

Specify voltage _____

Options

- ☐ Water Hammer Arrestor
- ☐ Drain Water Tempering Kit
- ☐ Scale Prevention System (SPS)
- ☐ Replacement Cartridge for SPS

Accessories

- ☐ 36-Compartment Rack
 - ☐ 4-1/8" tall (105 mm)
 - ☐ 5-5/8" tall (143 mm)
 - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack

NOTE: A vent hood is not recommended above the Jackson Delta HT-E-SEER as it does not produce excessive vapors. Always check with the local building code to know what type of ventilation is required for commercial dish machine or glasswasher installations in your area.

Specifications

High temperature undercounter dishwasher with steam elimination and energy recovery

Operates on a single cold water connection

Uses 0.65 gallons (2.47 liters) of water per rack

Uses 13.0 gallons (49.21 liters) of water per hour

Cleans 20 racks per hour

Cleans 720 glasses per hour

12" (305 mm) chamber clearance

Three selectable cycles:
Normal - 145 seconds
Heavy - 213 seconds
Extra-Heavy - 313 seconds

Powerful 1 hp wash pump motor

Air insulated between body and stainless steel housing

One (1) each peg and combination rack included

Durable stainless steel construction




Intertek



Intertek



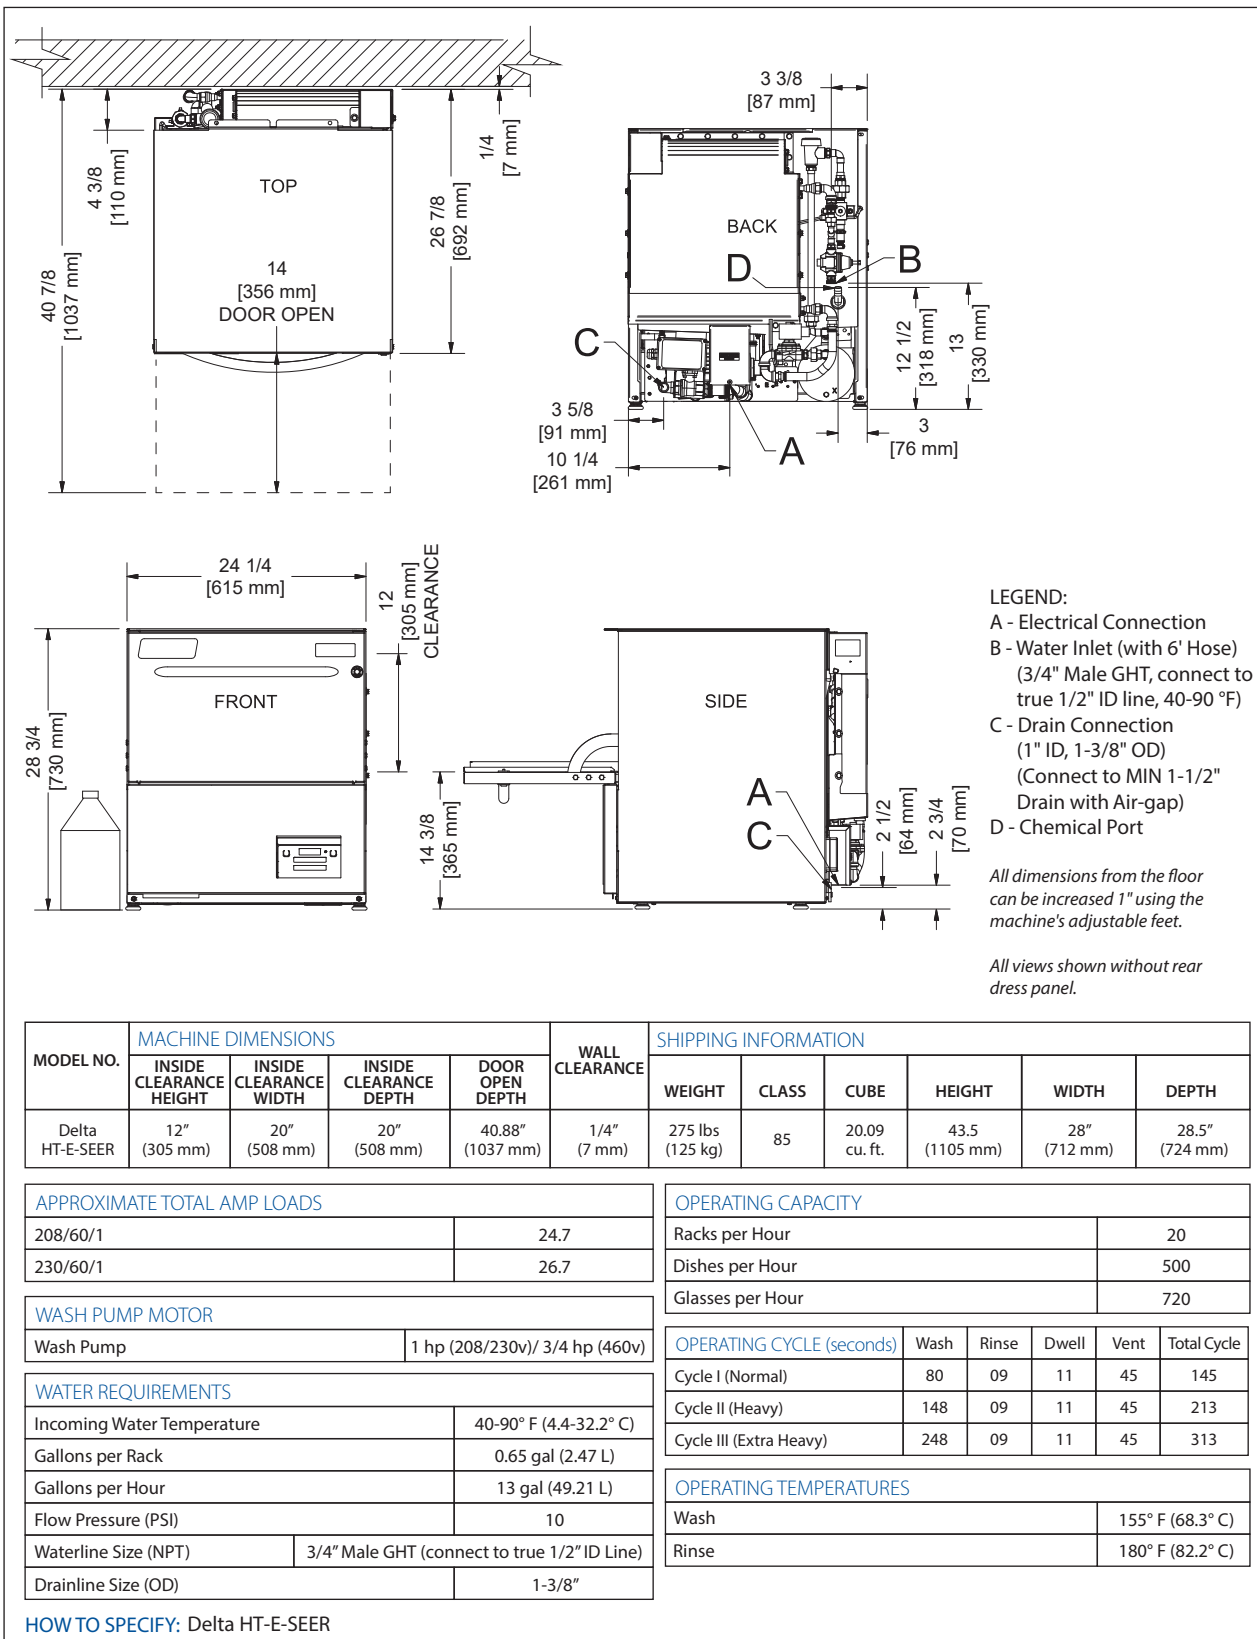

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O. Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-71-75 [06/26/19]

www.jacksonwws.com